

# The Effect of Total Solid Concentration on Biogas Production.

Ugwuoke C. Emmanuel, B.Eng.\*; Ukwuani T. Stanislus, B.Eng.; Eze N. Nixson, B.Eng.;  
Chikelu C. Celestine, B.Eng. and Osondu C. Loveday, B.Eng.

Projects Development Institute (PRODA), Emene Ind.L/out, Emene, Enugu, Nigeria.

E-mail: [emmychyugwuoke@yahoo.com](mailto:emmychyugwuoke@yahoo.com)\*

## ABSTRACT

Global energy demand is rapidly increasing. In contrast, fossil fuel reserves are decreasing. Today, one of the major challenges is energy supplies for the future. Furthermore, the effects of global warming cannot be neglected anymore. Alternative energy sources such as biogas should be developed. This work investigated the effect of total solid concentration on anaerobic digestion and biogas production. Six laboratory scale digesters of 10 liters each were set up for the experiment. The digesters were charge with 5 kg each of different waste (goat, pig, cow, and poultry droppings). The experiment were performed in batches with six digesters in a batch, the slurry in the digesters were raised to temperature of 40°C, 45°C, 50°C, 55°C, and 60°C with one digester being used as control experiment. Samples were taken every two days from each digesters and total solid concentration in percent (%) were determined and recorded. The graph of total solid concentration against number of days was plotted.

(Keywords: total solid, anaerobic digestion, biogas production, temperature, digester, agricultural waste)

## INTRODUCTION

Biogas production is an anaerobic digestion process which involves microbial activity on the substrate. The rate of biogas yield is highly dependent on total solid content of the feedstock. The total solids (TS) concentration of the waste influences the pH, temperature and effectiveness of the microorganisms in the decomposition process [1].

The potential for biogas production in the world is very large [1] and in Sweden this potential is approximately 10 times higher than the present production [2]. In the 1970s, many biogas plants

were constructed in municipal wastewater treatment plants [3]. The main aim was to reduce the biomass that was produced from anaerobic digestion [3], and it was not to obtain methane. Biogas was often released into the atmosphere.

The number of farm-size biogas plants increased in the 1970s due to an oil crisis but farmers often had problems with the operation [3]. The methane recovery from landfills started in the 1980s [3]. This was an important issue, since methane released into the atmosphere is nearly 30 times much more effective than CO<sub>2</sub> in trapping the earth's radiated heat and contributes 18% to the greenhouse effect [4]. Today, in Sweden there are more than 233 biogas plants [5]. Due to carbon abatement policies and in order to achieve energy policy targets, use of bio energy is projected to increase in Sweden [5].

Biogas production according to feeding process: There are many processes adopted for the treatment of organic wastes with different purposes in feeding. This can also be referred to as method of biogas production according to feeding process.

(A) **Continuous Feeding:** In continuous operation the substrate is fed to the digester continuously (daily interval, weekly or hourly) after the production of gas been established so that the rates of gas production, input and output are steady with time. Majority of the digesters designs are intended for continuous operation. It is often claim that continuous operation is more efficient (i.e. has higher gas production rates per unit digester given volume) than batch operation. It was also observed that the pre-treated feedstock has more biogas yield than the untreated feedstock [6].

(B) **Batch Fermentation:** Here, the digester are fed once, when gas yield drops to a low level after a period of fermentation, the digesters can be

emptied and fed once again. In fact, one advantages of batch operation is that attention is not as crucial with continuous operation where maintenance of steady operation condition is virtually important. Biogas production according to operating temperature.

(i) **Thermophilic Fermentation:** This is characterized by a temperature range of 45-60 °C with rapid digestion, high gas yield and short retention time. This process is used for disposal of excretes and other wastes because of its food disinfection. The waste from wineries with high temperature is suitable for thermophilic fermentation.

(ii) **Mesophilic Fermentation:** Mesophilic temperature is 30-45 °C characterized by slow decomposition feedstock and less energy consumption. This range gives highest yield of methane (i.e., methane production is prime objective compared to other temperatures).


## MATERIALS AND METHODS

### Collection of Materials


The pig, cow and goat dung were collected from Ugwuoke's farm in Iheakpu- Awka, Igbo Eze South Local Government of Enugu State, Nigeria. While the poultry droppings were collected from Eze's farm in Nsude, Udi Local Government Area, in Enugu, State.

### Statistical Analysis


ANOVA test was performed with software SPSS 16.0 to see the statistical significant differences between the pre-treatment with different substrates. The statistical significance level was selected at P-value<0.05.

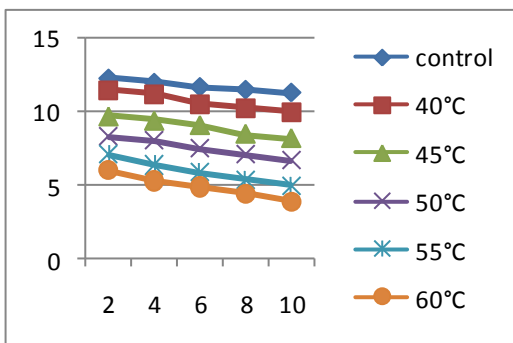


**Figure 1:** Graph of Total Solid Concentration against Time (days) of Goat Dung.

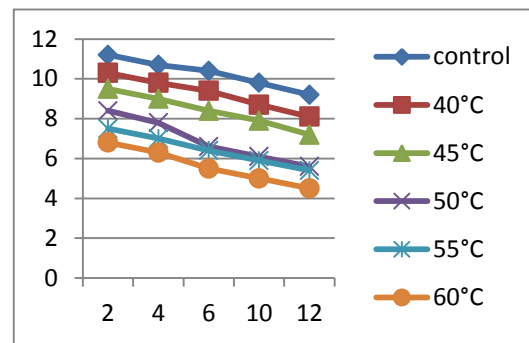

**Figure 3:** Graph of Total Solid Concentration against Time (days) of Cow Dung.

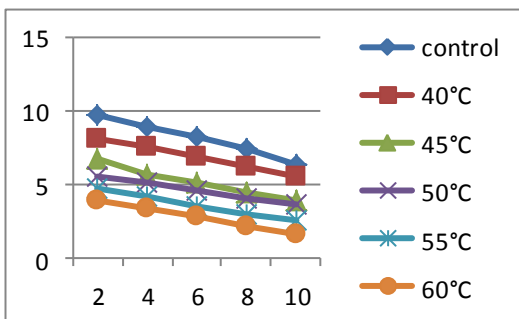

**Figure 2:** Graph of Total Solid Concentration against Time (days) of Pig Dung.

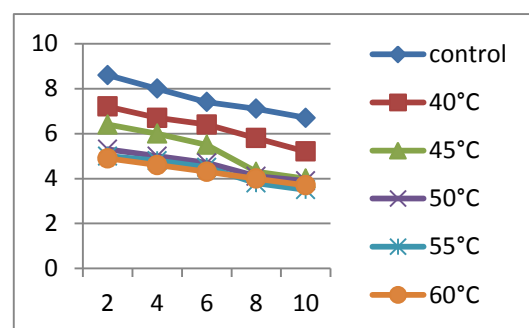

**Figure 4:** Graph of Total Solid Concentration against Time (days) of Poultry Droppings.

## RESULTS AND CONCLUSION

The results showed that total solid contribute to anaerobic degradation and as well biogas production. From Figures 1 - 4 the graph sloped downward from left to right which indicate that the total solid degradation increased. The higher the total solid in a feedstock the less the biogas production.

Therefore experiment two represented with Figure 2 had higher biogas yield due to more degradation of total solid. The control experiment in the graphs has low total solid degradation compare to other experiment with each dung type.

## REFERENCES

1. Khanal, S. 2008. *Anaerobic Biotechnology for Bio Energy Production: Principles and Applications*. Wiley-Blackwell: London, UK.
2. Lantz, M., M. Svensson, L. Björnsson , and P. Börjesson. 2007. "The Prospects for an Expansion of Biogas Systems in Sweden—Incentives, Barriers and Potentials". *Energy Policy*. 35:1830–1843.
3. Ertem, F.C. 2011. "Improving Biogas Production by Anaerobic Digestion of Different Substrates: Calculation of Potential Energy Outcomes". Master Thesis in Applied Environmental Science. Halmstad University: Halmstad, Sweden.
4. Björnsson, L. 2000. "Intensification of the Biogas Process by Improved Process Monitoring and Biomass Retention". Lund University.
5. Swedish Energy Agency. 2006. "The Future of Bio Energy in Sweden". Available online at: [http://webbshop.cm.se/System/ViewResource.aspx?p=Energimyndigheten&rl=default:/Resources/Permanent/Static/f4aa88b68bc241f5a67f19448069372/ER2006\\_30w.pdf](http://webbshop.cm.se/System/ViewResource.aspx?p=Energimyndigheten&rl=default:/Resources/Permanent/Static/f4aa88b68bc241f5a67f19448069372/ER2006_30w.pdf), [Accessed on 28 February 2011].
6. Ugwuoke, E., N. Eze, et al. 2015. "Effect of Thermal Pre-treated Poultry Droppings and Pig Dung O N Biogas Production". *International Journal of Advanced Engineering and Science*. 2(7).
7. Hobson, P.N., S. Bousfield, and R. Summers. 1981. *Methane Production from Agricultural and Domestic Waste*. Applied Science Publishers Ltd.: London, UK. 269 pp.

## ABOUT THE AUTHORS

**Ugwuoke Emmanuel** is an M.Eng. student of University of Nigeria Nsukka. He holds a B.Eng. in Mechanical Engineering from the same school. He is presently working as a Research Engineer with Projects Development Institute (PRODA).

**Ukwuani Stanislus** is a Research Engineer with Projects Development Institute (PRODA). He holds a B.Eng. in Mechanical Engineering from Enugu State University of Science and Technology. He is a Registered Engineer with Council for Regulation of Engineering in Nigeria (COREN). He is also a member of Nigerian Society of Engineers (NSE).

**Eze Nixson** is a Research Engineer with Projects Development Institute (PRODA). He holds a B.Eng. in Mechanical Engineering from Enugu State University of Science and Technology. He is a Registered Engineer with Council for Regulation of Engineering in Nigeria (COREN). He is also a member of Nigerian Society of Engineers (NSE).

**Chikelu Celestine** is a Research Engineer with Projects Development Institute (PRODA). He holds a B.Eng. in Mechanical Engineering from University of Nigeria Nsukka. He is a Registered Engineer with Council for Regulation of Engineering in Nigeria (COREN). He is also a member of Nigerian Society of Engineers (NSE).

**Osondu Loveday** is a Research Engineer with Projects Development Institute (PRODA). He holds B.Eng. in Mechanical Engineering from Federal University of Technology, Owerri.

## SUGGESTED CITATION

Emmanuel, U.C., U.T. Stanislus, E.N. Nixson, C.C. Celestine, and O.C. Loveday. 2015. "The Effect of Total Solid Concentration on Biogas Production". *Pacific Journal of Science and Technology*. 16(2):43-45.

